

Fluid Cooling Shell & Tube A Series

Performance Notes

- ITT interchange
- B or HC series is recommended for new applications
- Competitively priced
- NPT, SAE O-Ring, SAE flange, or BSPP shell side connections available
- End bonnets removable for servicing
- Mounting feet included (may be rotated in 90° increments)



Options

Non-ferrous construction
(water-to-water service)

90/10 copper nickel cooling tubes, bronze
end bonnets for sea water service and zinc anodes

Ratings

Maximum Operating Pressure - Shell Side
300 PSI

Maximum Operating Pressure - Tube Side
150 PSI

Maximum Operating Temperature
300°F

Materials

Tubes Copper

Hubs & Tubesheets Steel or brass

Shell Steel or brass

Baffles Brass

End Bonnets Cast iron

Mounting Brackets Steel

Gaskets Nitrile rubber/cellulose fiber

Nameplate Aluminum foil

How to Order

| | | | | | | | | |
|-----------------------------------------|----------------------------|-----------------------|---------------------------|-----------------------------------------------|-----------------------------|------------------------------|---------------------------------|--------------------------|
| | | | | | | | | |
| Model Series | Model Size Selected | Baffle Spacing | Tube Diameter Code | Tube Side Passes | Shell Material | Cooling Tube Material | End Bonnet Material | Zinc Anodes |
| SA SAF A AS AM AF AFM | | | 4 - 1/4" 6 - 3/8" | O - One Pass T - Two Pass F - Four Pass | Blank - Steel BR - Brass | Blank - Copper CN - CuNi | Blank - Cast Iron B - Bronze | Blank - None Z - Zinc |

SA = NPT Shell side, NPT Tube. Available in 1200 & 1600 models only.

SAF = SAE 4 Bolt Flange (with UNC threads) Shell side connections; NPT Tube side connections. Available in 1200 & 1600 models only.

A = NPT Shell side connections; NPT Tube side connections (Not available in 400s. See SA)

AS = SAE O-Ring Shell side connections; NPT Tube side connections

AM = BSPP Shell side connections; BSPP Tube side connections


AF = SAE 4 Bolt Flange (with UNC threads) Shell side connections; NPT Tube side connections

AFM = SAE 4 Bolt Flange (with Metric threads) Shell side connections; BSPP Tube side connections

SAE flanges available on some models. Consult factory for details.

Dimensions

One Pass

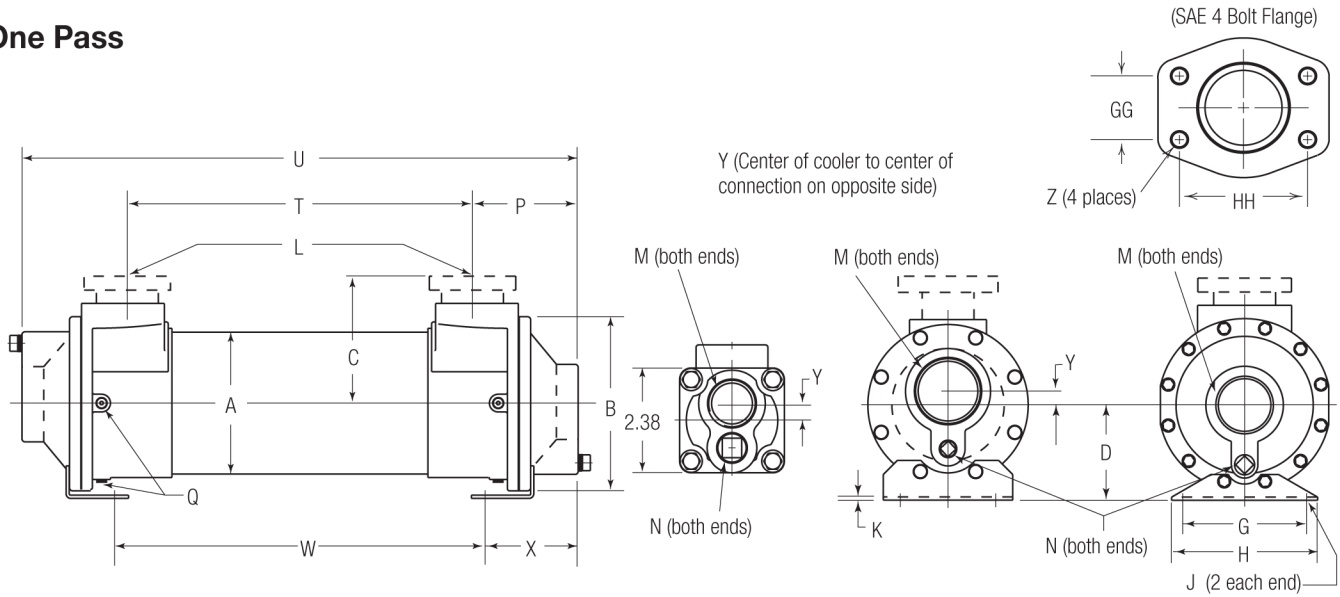

| Flange Size | GG | HH | Z - CF | Z - CFM |
|-------------|------|------|------------|---------|
| 1 | 1.03 | 2.06 | 3/8-16 UNC | M-10 |
| 1.50 | 1.41 | 2.75 | 1/2-13 UNC | M-12 |
| 2 | 1.69 | 3.06 | 1/2-13 UNC | M-12 |
| 3 | 2.44 | 4.19 | 5/8-11 UNC | M-16 |

A-400 Series

**A-600
A-800 Series**

**A-1000, A-1200
A-1600 Series**


| Model | A Dia. | B Dia. | C | | D | G | H | J | K | L | | M NPT | N NPT | P | Q NPT | T | U | W | X | Y |
|--------|--------|--------|---------------------|-------------------|------|------|------|------------|-----|-----------------|-----------------------------|-------|-------|------|---------|-------|-------|-------|------|-----|
| | | | NPT/BSPP SAE O-Ring | SAE 4 Bolt Flange | | | | | | NPT/BSPP Flange | SAE O-Ring | | | | | | | | | |
| SA-408 | 2.12 | — | 1.69 | — | — | — | — | — | — | 1.00 | N/A | .75 | .38 | 2.38 | — | 6.25 | 11.00 | — | — | .38 |
| A-608 | 3.12 | 4.19 | 2.44 | C/F | 2.44 | 2.50 | 3.50 | .38 x .88 | .12 | 1.00 | #16, 1 1/16-12 UNF-2B | 1.50 | .38 | 2.56 | (2) .25 | 6.12 | 11.25 | 5.47 | 3.06 | .38 |
| A-614 | 3.12 | 4.19 | 2.44 | C/F | 2.44 | 2.50 | 3.50 | .38 x .88 | .12 | 1.00 | | 1.50 | .38 | 2.56 | (2) .25 | 12.12 | 17.25 | 11.47 | 3.06 | .38 |
| A-624 | 3.12 | 4.19 | 2.44 | C/F | 2.44 | 2.50 | 3.50 | .38 x .88 | .12 | 1.00 | | 1.50 | .38 | 2.56 | (2) .25 | 22.12 | 27.25 | 21.47 | 3.06 | .38 |
| A-814 | 4.12 | 5.88 | 3.12 | C/F | 3.50 | 3.50 | 4.75 | .50 x 1.62 | .12 | 1.50 | #24, 1 1/8-12 UN-2B | 2.00 | .38 | 3.44 | (6) .38 | 11.12 | 18.00 | 12.88 | 2.56 | .50 |
| A-824 | 4.12 | 5.88 | 3.12 | C/F | 3.50 | 3.50 | 4.75 | .50 x 1.62 | .12 | 1.50 | | 2.00 | .38 | 3.44 | (6) .38 | 21.12 | 28.00 | 22.88 | 2.56 | .50 |
| A-836 | 4.12 | 5.88 | 3.12 | C/F | 3.50 | 3.50 | 4.75 | .50 x 1.62 | .12 | 1.50 | | 2.00 | .38 | 3.44 | (6) .38 | 33.12 | 40.00 | 34.88 | 2.56 | .50 |
| A-1014 | 5.12 | 6.50 | 3.62 | 4.34 | 3.50 | 4.00 | 5.00 | .44 x 2.20 | .12 | 1.50 | #32, 2 1/2-12 UN-2B | 2.50 | .38 | 3.69 | (6) .25 | 11.12 | 18.50 | 11.75 | 3.38 | .50 |
| A-1024 | 5.12 | 6.50 | 3.62 | 4.34 | 3.50 | 4.00 | 5.00 | .44 x 2.20 | .12 | 1.50 | | 2.50 | .38 | 3.69 | (6) .25 | 21.12 | 28.50 | 21.75 | 3.38 | .50 |
| A-1036 | 5.12 | 6.50 | 3.62 | 4.34 | 3.50 | 4.00 | 5.00 | .44 x 2.20 | .12 | 1.50 | | 2.50 | .38 | 3.69 | (6) .25 | 33.12 | 40.50 | 33.75 | 3.38 | .50 |
| A-1224 | 6.12 | 7.50 | 4.25 | 4.84** | 4.12 | 5.00 | 6.00 | .50 x .88 | .12 | 2.00 | #32, 2 1/2-12 UN-2B | 3.00 | .50 | 4.25 | (6) .25 | 20.50 | 29.00 | 21.50 | 3.75 | .50 |
| A-1236 | 6.12 | 7.50 | 4.25 | 4.84** | 4.12 | 5.00 | 6.00 | .50 x .88 | .12 | 2.00 | | 3.00 | .50 | 4.25 | (6) .25 | 32.50 | 41.00 | 33.50 | 3.75 | .50 |
| A-1248 | 6.12 | 7.50 | 4.25 | 4.84** | 4.12 | 5.00 | 6.00 | .50 x .88 | .12 | 2.00 | | 3.00 | .50 | 4.25 | (6) .25 | 44.50 | 53.00 | 45.50 | 3.75 | .50 |
| A-1260 | 6.12 | 7.50 | 4.25 | 4.84** | 4.12 | 5.00 | 6.00 | .50 x .88 | .12 | 2.00 | | 3.00 | .50 | 4.25 | (6) .25 | 56.50 | 65.00 | 57.50 | 3.75 | .50 |
| A-1624 | 8.00 | 9.75 | 5.62 | 6.12*** | 5.38 | 7.00 | 8.25 | .62 x 1.12 | .19 | 3.00 | — | 3.00 | .50 | 6.00 | (6) .25 | 19.00 | 31.00 | 20.50 | 5.25 | .50 |
| A-1636 | 8.00 | 9.75 | 5.62 | 6.12*** | 5.38 | 7.00 | 8.25 | .62 x 1.12 | .19 | 3.00 | — | 3.00 | .50 | 6.00 | (6) .25 | 31.00 | 43.00 | 44.50 | 5.25 | .50 |
| A-1648 | 8.00 | 9.75 | 5.62 | 6.12*** | 5.38 | 7.00 | 8.25 | .62 x 1.12 | .19 | 3.00 | — | 3.00 | .50 | 6.00 | (6) .25 | 43.00 | 55.00 | 44.50 | 5.25 | .50 |
| A-1660 | 8.00 | 9.75 | 5.62 | 6.12*** | 5.38 | 7.00 | 8.25 | .62 x 1.12 | .19 | 3.00 | — | 3.00 | .50 | 6.00 | (6) .25 | 55.00 | 67.00 | 56.50 | 5.25 | .50 |
| A-1672 | 8.00 | 9.75 | 5.62 | 6.12*** | 5.38 | 7.00 | 8.25 | .62 x 1.12 | .19 | 3.00 | — | 3.00 | .50 | 6.00 | (6) .25 | 67.00 | 79.00 | 68.50 | 5.25 | .50 |

*SA-408 SAE Flange not available. **SAF-1200 5.88. ***SAF-1600 7.38.

NOTE: We reserve the right to make reasonable design changes without notice. Consult factory. All dimensions are inches.

Dimensions

Two Pass

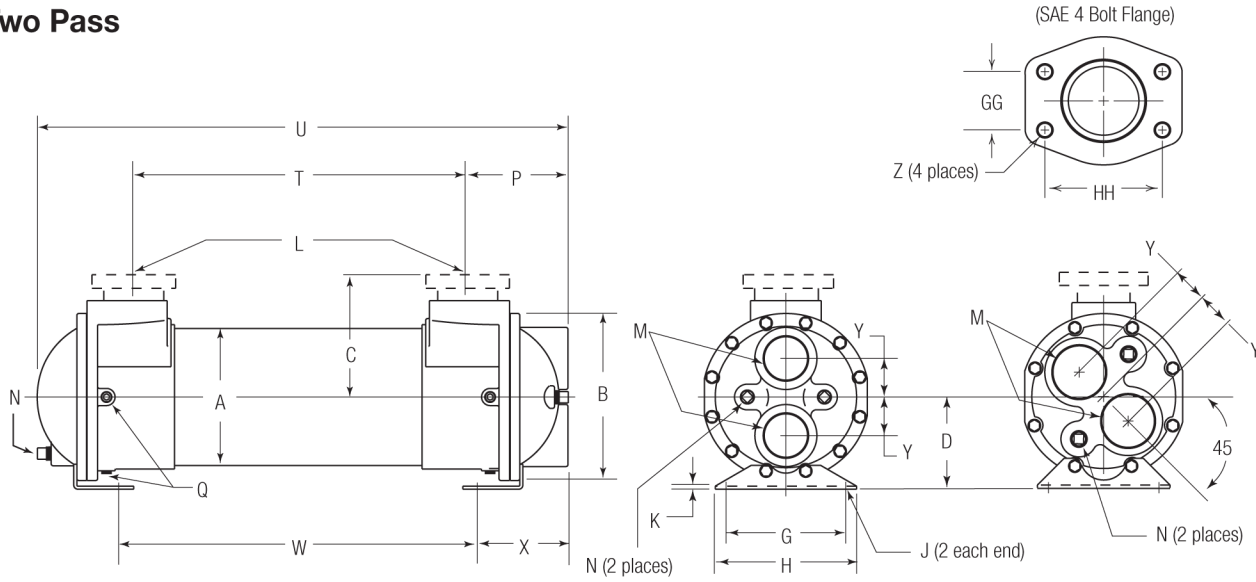

**A-600, A-800, A-1000
A-1600 Series**

A-1200 Series

| Flange Size | GG | HH | Z - CF | Z - CFM |
|-------------|------|------|------------|---------|
| 1 | 1.03 | 2.06 | 3/8-16 UNC | M-10 |
| 1.50 | 1.41 | 2.75 | 1/2-13 UNC | M-12 |
| 2 | 1.69 | 3.06 | 1/2-13 UNC | M-12 |
| 3 | 2.44 | 4.19 | 5/8-11 UNC | M-16 |


| Model | A Dia. | B Dia. | C | | D | G | H | J | K | L | | M NPT | N NPT | P | Q NPT | T | U | W | X | Y |
|--------|--------|--------|---------------------|-------------------|------|------|------|------------|-----|-----------------|---------------------|-------|-------|------|---------|-------|-------|-------|------|------|
| | | | NPT/BSPP SAE O-Ring | SAE 4 Bolt Flange | | | | | | NPT/BSPP Flange | SAE O-Ring | | | | | | | | | |
| A-608 | 3.12 | 4.19 | 2.44 | C/F | 2.44 | 2.50 | 3.50 | .38 x .88 | .12 | 1.00 | #16, | 1.00 | .38 | 2.44 | (2) .25 | 6.12 | 10.75 | 5.47 | 2.94 | 1.00 |
| A-614 | 3.12 | 4.19 | 2.44 | C/F | 2.44 | 2.50 | 3.50 | .38 x .88 | .12 | 1.00 | 1 1/16-12 | 1.00 | .38 | 2.44 | (2) .25 | 12.12 | 16.75 | 11.47 | 2.94 | 1.00 |
| A-624 | 3.12 | 4.19 | 2.44 | C/F | 2.44 | 2.50 | 3.50 | .38 x .88 | .12 | 1.00 | UNF-2b | 1.00 | .38 | 2.44 | (2) .25 | 22.12 | 26.75 | 21.47 | 2.94 | 1.00 |
| A-814 | 4.12 | 5.88 | 3.12 | C/F | 3.50 | 3.50 | 4.75 | .50 x 1.62 | .12 | 1.50 | #24, 1 1/8-12 UN-2B | 1.25 | .38 | 3.44 | (6) .38 | 11.12 | 17.62 | 12.88 | 2.56 | 1.19 |
| A-824 | 4.12 | 5.88 | 3.12 | C/F | 3.50 | 3.50 | 4.75 | .50 x 1.62 | .12 | 1.50 | | 1.25 | .38 | 3.44 | (6) .38 | 21.12 | 27.62 | 22.88 | 2.56 | 1.19 |
| A-836 | 4.12 | 5.88 | 3.12 | C/F | 3.50 | 3.50 | 4.75 | .50 x 1.62 | .12 | 1.50 | #24, 1 1/8-12 UN-2B | 1.25 | .38 | 3.44 | (6) .38 | 33.12 | 39.62 | 34.88 | 2.56 | 1.19 |
| A-1014 | 5.12 | 6.50 | 3.62 | 4.34 | 3.50 | 4.00 | 5.00 | .44 x 2.20 | .12 | 1.50 | | 1.50 | .38 | 3.69 | (6) .25 | 11.12 | 18.31 | 11.75 | 3.38 | 1.50 |
| A-1024 | 5.12 | 6.50 | 3.62 | 4.34 | 3.50 | 4.00 | 5.00 | .44 x 2.20 | .12 | 1.50 | #24, 1 1/8-12 UN-2B | 1.50 | .38 | 3.69 | (6) .25 | 21.12 | 28.31 | 21.75 | 3.38 | 1.50 |
| A-1036 | 5.12 | 6.50 | 3.62 | 4.34 | 3.50 | 4.00 | 5.00 | .44 x 2.20 | .12 | 1.50 | | 1.50 | .38 | 3.69 | (6) .25 | 33.12 | 40.31 | 33.75 | 3.38 | 1.50 |
| A-1224 | 6.12 | 7.50 | 4.25 | 4.84 | 4.12 | 5.00 | 6.00 | .50 x .88 | .12 | 2.00 | #32, 2 1/2-12 UN-2B | 2.00 | .50 | 4.25 | (6) .25 | 20.50 | 28.75 | 21.50 | 3.75 | 1.56 |
| A-1236 | 6.12 | 7.50 | 4.25 | 4.84 | 4.12 | 5.00 | 6.00 | .50 x .88 | .12 | 2.00 | | 2.00 | .50 | 4.25 | (6) .25 | 32.50 | 40.75 | 33.50 | 3.75 | 1.56 |
| A-1248 | 6.12 | 7.50 | 4.25 | 4.84 | 4.12 | 5.00 | 6.00 | .50 x .88 | .12 | 2.00 | #32, 2 1/2-12 UN-2B | 2.00 | .50 | 4.25 | (6) .25 | 44.50 | 52.75 | 45.50 | 3.75 | 1.56 |
| A-1260 | 6.12 | 7.50 | 4.25 | 4.84 | 4.12 | 5.00 | 6.00 | .50 x .88 | .12 | 2.00 | | 2.00 | .50 | 4.25 | (6) .25 | 56.50 | 64.75 | 57.50 | 3.75 | 1.56 |
| A-1624 | 8.00 | 9.75 | 5.62 | 6.12 | 5.38 | 7.00 | 8.25 | .62 x 1.12 | .19 | 3.00 | — | 2.50 | .50 | 6.00 | (6) .25 | 19.00 | 30.50 | 20.50 | 5.25 | 2.25 |
| A-1636 | 8.00 | 9.75 | 5.62 | 6.12 | 5.38 | 7.00 | 8.25 | .62 x 1.12 | .19 | 3.00 | — | 2.50 | .50 | 6.00 | (6) .25 | 31.00 | 42.50 | 44.50 | 5.25 | 2.25 |
| A-1648 | 8.00 | 9.75 | 5.62 | 6.12 | 5.38 | 7.00 | 8.25 | .62 x 1.12 | .19 | 3.00 | — | 2.50 | .50 | 6.00 | (6) .25 | 43.00 | 54.50 | 44.50 | 5.25 | 2.25 |
| A-1660 | 8.00 | 9.75 | 5.62 | 6.12 | 5.38 | 7.00 | 8.25 | .62 x 1.12 | .19 | 3.00 | — | 2.50 | .50 | 6.00 | (6) .25 | 55.00 | 66.50 | 56.50 | 5.25 | 2.25 |
| A-1672 | 8.00 | 9.75 | 5.62 | 6.12 | 5.38 | 7.00 | 8.25 | .62 x 1.12 | .19 | 3.00 | — | 2.50 | .50 | 6.00 | (6) .25 | 67.00 | 78.50 | 68.50 | 5.25 | 2.25 |

*SAF-1200 5.88. **SAF-1600 7.38.

NOTE: We reserve the right to make reasonable design changes without notice. Consult factory. All dimensions are inches.

Dimensions

Four Pass

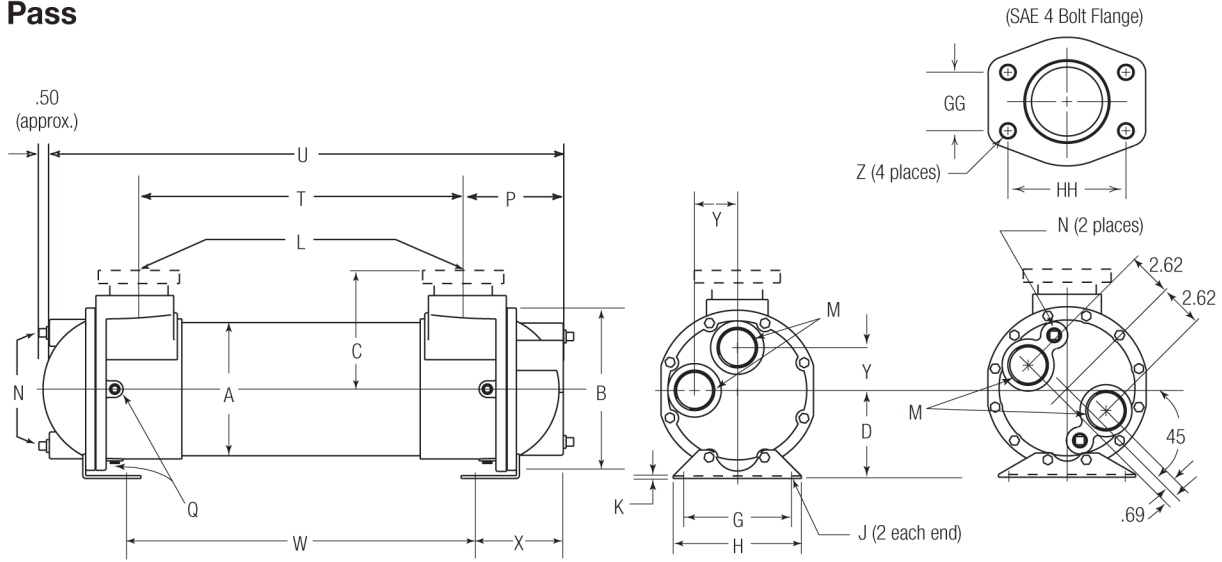

**A-600, A-800, A-1000
A-1200 Series**

A-1600 Series


| Flange Size | GG | HH | Z - CF | Z - CFM |
|-------------|------|------|------------|---------|
| 1 | 1.03 | 2.06 | 3/8-16 UNC | M-10 |
| 1.50 | 1.41 | 2.75 | 1/2-13 UNC | M-12 |
| 2 | 1.69 | 3.06 | 1/2-13 UNC | M-12 |
| 3 | 2.44 | 4.19 | 5/8-11 UNC | M-16 |

| Model | A Dia. | B Dia. | C | | D | G | H | J | K | L | | M NPT | N NPT | P | Q NPT | T | U | W | X | Y |
|--------|--------|--------|---------------------|-------------------|------|------|------|------------|-----|-----------------|-------------------------------------------------|-------|-------|------|---------|-------|-------|-------|------|------|
| | | | NPT/BSPP SAE O-Ring | SAE 4 Bolt Flange | | | | | | NPT/BSPP Flange | SAE O-Ring | | | | | | | | | |
| A-608 | 3.12 | 4.19 | 2.44 | C/F | 2.44 | 2.50 | 3.50 | .38 x .88 | .12 | 1.00 | #16, 1 ¹⁵ / ₁₆ -12 UNF-2b | .75 | .38 | 2.31 | (2) .25 | 6.12 | 10.88 | 5.47 | 2.81 | 1.00 |
| A-614 | 3.12 | 4.19 | 2.44 | C/F | 2.44 | 2.50 | 3.50 | .38 x .88 | .12 | 1.00 | #16, 1 ¹⁵ / ₁₆ -12 UNF-2b | .75 | .38 | 2.31 | (2) .25 | 12.12 | 16.88 | 11.47 | 2.81 | 1.00 |
| A-624 | 3.12 | 4.19 | 2.44 | C/F | 2.44 | 2.50 | 3.50 | .38 x .88 | .12 | 1.00 | #16, 1 ¹⁵ / ₁₆ -12 UNF-2b | .75 | .38 | 2.31 | (2) .25 | 22.12 | 26.88 | 21.47 | 2.81 | 1.00 |
| A-814 | 4.12 | 5.88 | 3.12 | C/F | 3.50 | 3.50 | 4.75 | .50 x 1.62 | .12 | 1.50 | #24, 1 ¹⁵ / ₁₆ -12 UN-2B | .75 | .38 | 3.44 | (6) .38 | 11.12 | 17.62 | 12.88 | 2.56 | 1.06 |
| A-824 | 4.12 | 5.88 | 3.12 | C/F | 3.50 | 3.50 | 4.75 | .50 x 1.62 | .12 | 1.50 | #24, 1 ¹⁵ / ₁₆ -12 UN-2B | .75 | .38 | 3.44 | (6) .38 | 21.12 | 27.62 | 22.88 | 2.56 | 1.06 |
| A-836 | 4.12 | 5.88 | 3.12 | C/F | 3.50 | 3.50 | 4.75 | .50 x 1.62 | .12 | 1.50 | #24, 1 ¹⁵ / ₁₆ -12 UN-2B | .75 | .38 | 3.44 | (6) .38 | 33.12 | 39.62 | 34.88 | 2.56 | 1.06 |
| A-1014 | 5.12 | 6.50 | 3.62 | 4.34 | 3.50 | 4.00 | 5.00 | .44 x 2.20 | .12 | 1.50 | #24, 1 ¹⁵ / ₁₆ -12 UN-2B | 1.00 | .38 | 3.56 | (6) .25 | 11.12 | 18.38 | 11.75 | 3.25 | 1.69 |
| A-1024 | 5.12 | 6.50 | 3.62 | 4.34 | 3.50 | 4.00 | 5.00 | .44 x 2.20 | .12 | 1.50 | #24, 1 ¹⁵ / ₁₆ -12 UN-2B | 1.00 | .38 | 3.56 | (6) .25 | 21.12 | 28.38 | 21.75 | 3.25 | 1.69 |
| A-1036 | 5.12 | 6.50 | 3.62 | 4.34 | 3.50 | 4.00 | 5.00 | .44 x 2.20 | .12 | 1.50 | #24, 1 ¹⁵ / ₁₆ -12 UN-2B | 1.00 | .38 | 3.56 | (6) .25 | 33.12 | 40.38 | 33.75 | 3.25 | 1.69 |
| A-1224 | 6.12 | 7.50 | 4.25 | 4.84 | 4.12 | 5.00 | 6.00 | .50 x .88 | .12 | 2.00 | #32, 2 ¹⁵ / ₁₆ -12 UN-2B | 1.50 | .50 | 4.25 | (6) .25 | 20.50 | 29.00 | 21.50 | 3.75 | 2.00 |
| A-1236 | 6.12 | 7.50 | 4.25 | 4.84 | 4.12 | 5.00 | 6.00 | .50 x .88 | .12 | 2.00 | #32, 2 ¹⁵ / ₁₆ -12 UN-2B | 1.50 | .50 | 4.25 | (6) .25 | 32.50 | 41.00 | 33.50 | 3.75 | 2.00 |
| A-1248 | 6.12 | 7.50 | 4.25 | 4.84 | 4.12 | 5.00 | 6.00 | .50 x .88 | .12 | 2.00 | #32, 2 ¹⁵ / ₁₆ -12 UN-2B | 1.50 | .50 | 4.25 | (6) .25 | 44.50 | 53.00 | 45.50 | 3.75 | 2.00 |
| A-1260 | 6.12 | 7.50 | 4.25 | 4.84 | 4.12 | 5.00 | 6.00 | .50 x .88 | .12 | 2.00 | #32, 2 ¹⁵ / ₁₆ -12 UN-2B | 1.50 | .50 | 4.25 | (6) .25 | 56.50 | 65.00 | 57.50 | 3.75 | 2.00 |
| A-1624 | 8.00 | 9.75 | 5.62 | 6.12" | 5.38 | 7.00 | 8.25 | .62 x 1.12 | .19 | 3.00 | — | 2.00 | .50 | 6.00 | (6) .25 | 19.00 | 30.75 | 20.50 | 5.25 | — |
| A-1636 | 8.00 | 9.75 | 5.62 | 6.12" | 5.38 | 7.00 | 8.25 | .62 x 1.12 | .19 | 3.00 | — | 2.00 | .50 | 6.00 | (6) .25 | 31.00 | 42.75 | 44.50 | 5.25 | — |
| A-1648 | 8.00 | 9.75 | 5.62 | 6.12" | 5.38 | 7.00 | 8.25 | .62 x 1.12 | .19 | 3.00 | — | 2.00 | .50 | 6.00 | (6) .25 | 43.00 | 54.75 | 44.50 | 5.25 | — |
| A-1660 | 8.00 | 9.75 | 5.62 | 6.12" | 5.38 | 7.00 | 8.25 | .62 x 1.12 | .19 | 3.00 | — | 2.00 | .50 | 6.00 | (6) .25 | 55.00 | 66.75 | 56.50 | 5.25 | — |
| A-1672 | 8.00 | 9.75 | 5.62 | 6.12" | 5.38 | 7.00 | 8.25 | .62 x 1.12 | .19 | 3.00 | — | 2.50 | .50 | 6.00 | (6) .25 | 67.00 | 78.75 | 68.50 | 5.25 | — |

*SAF-1200 5.88. **SAF-1600 7.38.

NOTE: We reserve the right to make reasonable design changes without notice. Consult factory. All dimensions are inches.

Performance Curves

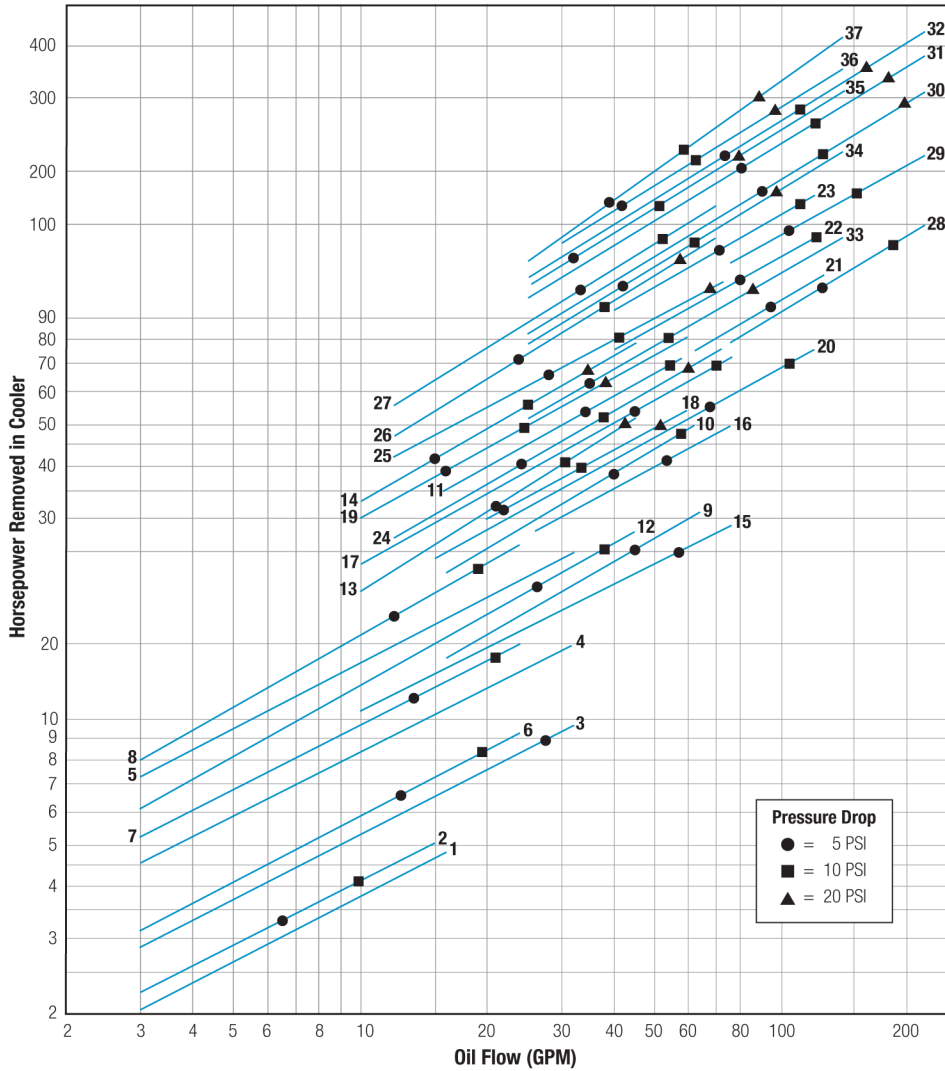


| Curve Number | Model | Shipping Weight (LBS) |
|--------------|----------------|-----------------------|
| 1 | SA-408-2-4-0 | 7 |
| 2 | SA-408-.75-4-0 | 7 |
| 3 | A-608-2-4-F | 12 |
| 4 | A-614-4-4-F | 17 |
| 5 | A-624-4-4-F | 20 |
| 6 | A-608-1-4-F | 12 |
| 7 | A-614-1.5-4-F | 17 |
| 8 | A-624-2-4-F | 20 |
| 9 | A-814-3-4-F | 40 |
| 10 | A-824-4-4-F | 50 |
| 11 | A-836-4-4-F | 58 |
| 12 | A-814-1.5-4-F | 40 |
| 13 | A-824-2-4-F | 50 |
| 14 | A-836-2-4-F | 58 |
| 15 | A-1014-3-6-F | 49 |
| 16 | A-1024-4-6-F | 63 |
| 17 | A-1036-4-6-F | 72 |
| 18 | A-1024-2-6-F | 63 |
| 19 | A-1036-2-6-F | 72 |
| 20 | A-1224-4-6-F | 78 |
| 21 | A-1236-6-6-F | 118 |
| 22 | A-1248-6-6-F | 143 |
| 23 | A-1260-6-6-F | 165 |
| 24 | A-1224-2-6-F | 78 |
| 25 | A-1236-3-6-F | 118 |
| 26 | A-1248-3-6-F | 143 |
| 27 | A-1260-4-6-F | 165 |
| 28 | A-1624-6-6-F | 180 |
| 29 | A-1636-6-6-F | 210 |
| 30 | A-1648-6-6-F | 250 |
| 31 | A-1660-6-6-F | 286 |
| 32 | A-1672-6-6-F | 330 |
| 33 | A-1624-2-6-F | 180 |
| 34 | A-1636-3-6-F | 210 |
| 35 | A-1648-3-6-F | 250 |
| 36 | A-1660-4-6-F | 286 |
| 37 | A-1672-4-6-F | 330 |


Shipping weights are approximate.

Piping Diagram

One Pass

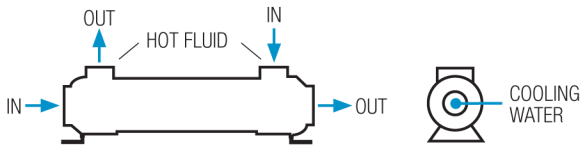

Two and Four Pass

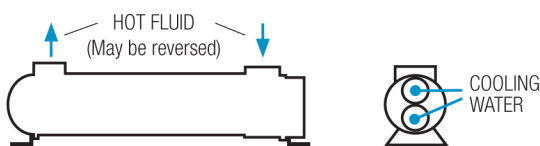

Specific applications may have different piping arrangements. Contact factory for assistance.

Selection Procedure

Performance Curves are based on 100SSU oil leaving the cooler 40°F higher than the water temperature used for cooling. This is also referred to as a 40°F approach temperature. Curves are based on a 2:1 oil to water flow ratio.

STEP 1 Determine the Heat Load. This will vary with different systems, but typically coolers are sized to remove 25 to 50% of the input nameplate horsepower. (Example: 100 HP Power Unit x .33 = 33 HP Heat load.)
 If BTU/HR is known: $HP = \frac{BTU/HR}{2545}$

STEP 1 Determine Approach Temperature. Desired oil leaving cooler °F – Water Inlet temp. °F = Actual Approach (Max. reservoir temp.)

STEP 1 Determine Curve Horsepower Heat Load. Enter the information from above:

$$\text{Horsepower heat load} \times \frac{40}{\text{Actual Approach}} \times \frac{\text{Viscosity}}{\text{Correction A}} = \text{Curve Horsepower}$$

STEP 1 Enter curves at oil flow through cooler and curve horsepower. Any curve above the intersecting point will work.

STEP 1 Determine Oil Pressure Drop from Curves:
 ● = 5 PSI ■ = 10 PSI ▲ = 20 PSI Multiply pressure drop from curve by correction factor B found on oil viscosity correction curve.

Oil Temperature

Oil coolers can be selected using entering or leaving oil temperatures.

Typical operating temperature ranges are:

| | |
|-----------------------|---------------|
| Hydraulic Oil | 110°F - 130°F |
| Hydrostatic Drive Oil | 130°F - 180°F |
| Bearing Lube Oil | 120°F - 160°F |
| Lube Oil Circuits | 110°F - 130°F |

Desired Reservoir Temperature

Return Line Cooling: Desired temperature is the oil temperature leaving the cooler. This will be the same temperature that will be found in the reservoir.

Off-Line Recirculation Cooling Loop: Desired temperature is the oil temperature *entering* the cooler. In this case, the oil temperature change must be determined so that the actual oil leaving temperature can be found. Calculate the oil temperature change (oil ΔT) with this formula:

$$\text{Oil } \Delta T = (\text{BTUs/HR}) / (\text{GPM Oil Flow} \times 210)$$


To calculate the oil leaving temperature from the cooler, use this formula:

$$\text{Oil Leaving Temp.} = \text{Oil Entering Temp.} - \text{Oil } \Delta T$$

This formula may also be used in any application where the only temperature available is the entering oil temperature.

Oil Pressure Drop: Most systems can tolerate a pressure drop through the heat exchanger of 20 to 30 PSI. Excessive pressure drop should be avoided. Care should be taken to limit pressure drop to 5 PSI or less for case drain applications where high back pressure may damage the pump shaft seals.

Viscosity Correction

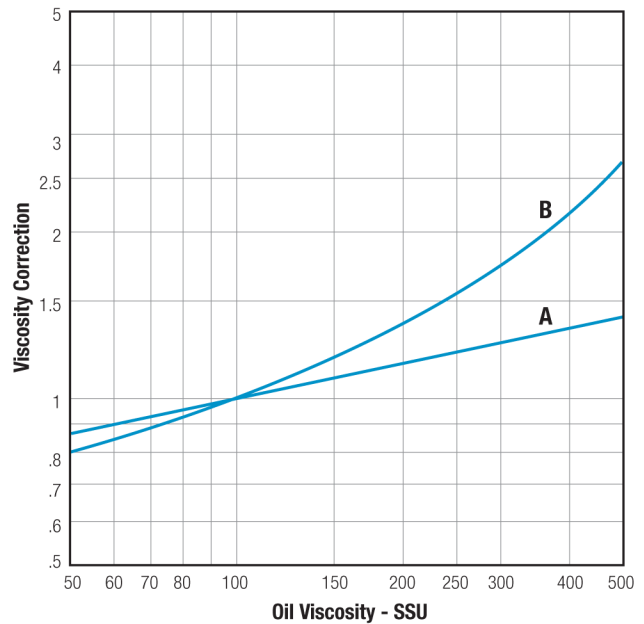

Maximum Flow Rates

Example Model No.
A - 1024 - 2 - 6 - F

| Unit Size | Baffle Spacing | Shell Side (GPM) | Tube Side (GPM) | | |
|-------------|----------------|------------------|-----------------|-----|----|
| | | | O | T | F |
| 400 | .75, 2 | 7, 19 | 18 | – | – |
| 608 | 1, 2 | 14, 29 | 48 | 24 | 12 |
| 614 | 1.5, 4 | 21, 29 | 48 | 24 | 12 |
| 624 | 2, 4 | 29 | 48 | 24 | 12 |
| 814 | 1.5, 3 | 29, 57 | 87 | 44 | 22 |
| 824 & 836 | 2, 4 | 38, 69 | 87 | 44 | 22 |
| 1014 | 1.5, 3 | 32, 64 | 146 | 73 | 37 |
| 1024 & 1036 | 2, 4 | 42, 69 | 146 | 73 | 37 |
| 1224 | 2, 4 | 51, 103 | 224 | 112 | 56 |
| 1236 & 1248 | 3, 6 | 77, 115 | 224 | 112 | 56 |
| 1260 | 4, 6 | 103, 115 | 224 | 112 | 56 |
| 1624 | 2, 6 | 66, 200 | 280 | 140 | 70 |
| 1636 & 1648 | 3, 6 | 100, 200 | 280 | 140 | 70 |
| 1660 & 1672 | 4, 6 | 133, 200 | 280 | 140 | 70 |

Caution: Incorrect installation can cause this product to fail prematurely, causing the shell side and tube side fluids to intermix.